


2/4-Port HDMI Splitter

HDMI splitter is equipped with single HDMI inputs and two or four HDMI outputs. Single input accommodate the simultaneous connection of up to high definition video sources, such as satellite systems and HD DVD players. Two or four outputs send the high definition audio/video signals to up to diversiform high definition displays.



HDMI Splitter Connection

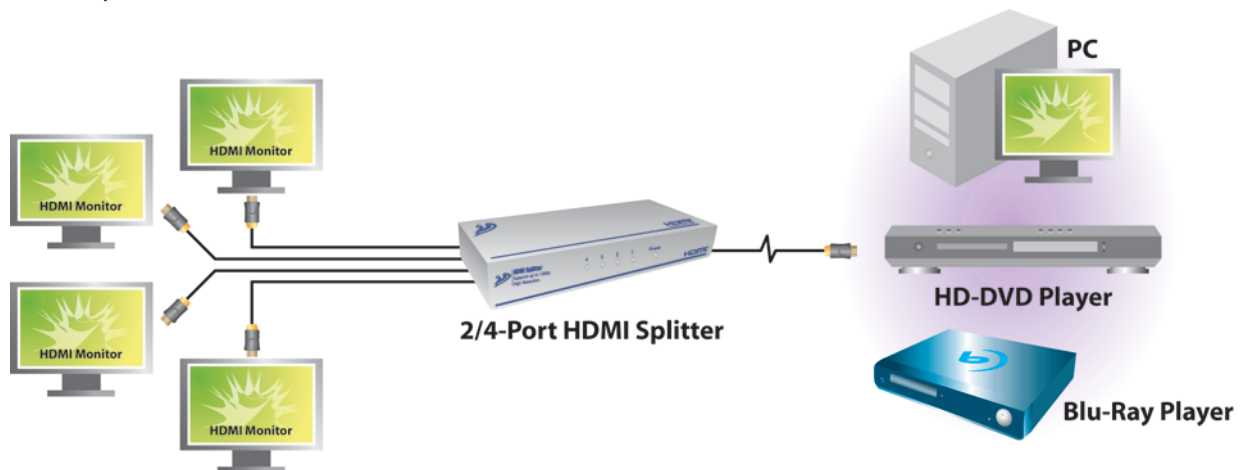

Features

- Conform to HDMI 1.3 specifications
- Fully HDCP 1.1 compliant
- Compatible to all HDMI equipped devices, HDCP-enable HDTV devices
- Two or Four HDMI Sink using one High Definition Source
- The cable length from input device to this switch box plus this switch box to output device is maximum 30 meters
- Supports high resolution input:
PC: VGA, SVGA, VGA, SXGA and UXGA
HDTV: 480i, 576i, 480p, 576p, 1080i and 1080p

SP-H00102-0B/SP-H00104-0B Specifications:

- 1x HDMI source input port
- 2/4 HDMI display device output Ports
- HDMI source Input port connector (Female): HDMI 19-pin Type A
- Display Device Output Port Connector (Female): HDMI 19-pin Type A
- 2/4 Display Device Port LED
- 1x Power LED
- Video Band Width(bps): 2.25G single link
- EDID emulation: Yes
- Single Link Range: 1920 x 1080P @60HZ, UXGA
- Vertical Frequency Range: 60Hz
- Maximum Total Cable Length (meters): 30M
- Power Supply: DC 5V, 1A(2-port) / DC5V, 2.6A(4-port)
- Operation Temperature: 0~50°C
- Storage Temperature: -20~60°C
- Emission: CE, FCC, C-Tick
- Enclosure: Metal
- Dimension: 149 x 64 x 23mm
- Weight (g): 272g(2-port) / 279g(4-port)